

KIRLOSKAR DIESEL ENGINES

Engine Model : DV8

No. of	Bore x Stroke	Displacement (cc)	Gross Power Output Rating as per ISO3046 at 1500 RPM bhp (kW)		Suitable Power Rating for Generator at 0.8 pf	
Cyls.	(mm)		Prime	Standby	Prime	Standby
8	130 x 150	15910	490 bhp (360.6 kW)	539 bhp (396 kW)	400 kVA	440 kVA

Features -

- Designed for heavy duty applications
- Extremely reliable
- Lower operating cost
- Easy maintenance higher uptime
- Superior design standards that minimize power deration even at high ambient temperatures.
- Winner of the frost & Sullivan Voice of Customer Award in the "Best Bang for Buck" category in the Indian Generating sets Market.

Ratings Definition:

Standby Ratings: These ratings are applicable for supplying continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings. The alternator on this model is peak continuous rated (as defined in ISO 8528-3)

Prime Rating: These ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercial purchased power. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1 hour in 12 hours.

Continuous Rating: These ratings are applicable for supplying power continuously to a constant load upto the full output rating for unlimited hours. No sustained overload capability is available for this rating.



Enriching Lives

Engine Technical Data :

Physical Data			
Engine Make	Kirloskar		
Engine Model	DV8		
Number of cylinders	8		
Configuration	V-type		
Туре	Four stroke		
Bore x Stroke (mm)	130 x 150		
Displacement (cc)	15910		
Cooling	Water cooled		
Aspiration	Turbocharged After cooled		
Compression Ratio	16.5 : 1		
Starting Arrangement	24V Electric		

Fuel System			
Type of fuel filter	Spin on type		
Governor Type	Electronic		
Class of Governing	ISO 3046 Class A0 & ISO 8528		
Fuel pump type	Inline		
Fuel pump make	Kirloskar		
Recommended Fuel	Class A2, High speed diesel		
Specific fuel consumption gm/bhp-hr	146		
Fuel consumption at 100% load +5% tolerance (lit/hr)	80.38		
Fuel consumption at 75% load +5% tolerance (lit/hr)	61.55		
Fuel consumption readings are based on diesel fuel with a specific gravity of 0.85 and confirming to BS 2869, Class A2)			

Air System			
Air Filter Type	Dry type replaceable element		-
Air Volume required for Ventilation (m³/hr)	27720		(
Combustion air flow (m³/hr)	1980		(
Total Air Flow required for ventilation (m³/hr)	27720		I
Total Fresh air required (m³/hr)	29700		I


Lubrication System			
Type of lube oil filter	Full flow spin on type		
Oil to be used	Multi grade 15W40 (CF4 or better)		
Oil pump type	Through G-rotor gear pump		
Lub oil sump capacity (lit)	41		
Lube oil consumption	0.12% of fuel consumption		

Electrical System			
Starting Arrangement	24V Electric		
Starter	24V Electric		
Starter Battery Rating	2x180 Amp-hr		
Battery charging alternator	Engine mounted 24V battery charger		
Battery charger amps	45		

Cooling System			
Cooling system capacity (lit)	123		
Water pump type	Centrifugal		
Radiator fan load (hp)	13.6		



Engine Dimensional Details :

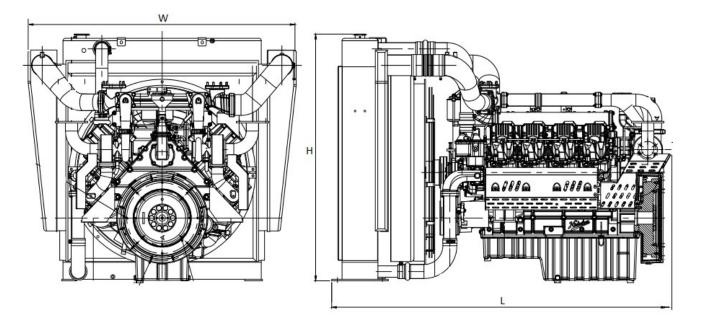

Dimensions in mm				
L	W	Н	For engine mounting dimensions please refer the respective	
2097	1750	1526	rating GA drawing	

Weight Details			Coupling
Engine weight without radiator	2030 / 1920	Flywheel Suitable for SAE 14" d Housing SAE1	Suitable for SAE 14" disc
Gross / Net (kg)			SAE1
Radiator and accessories weight Gross / Net (kg)	690 / 570	Coupling disc	Not supplied



Head Office: Laxmanrao Kirloskar Road, Khadki, Pune 411 003, India. Tel.: +91 20 2581 0341 / 534 Fax: +91 20 2581 3208 Website : <u>www.koel.co.in</u>

KIRLOSKAR DMCC

JBC-5, Cluster W, Jumeirah Lake Towers, P.O.Box 37745, Dubai. U.A.E Tel.: +971 4 443 8591 Fax: +971 4 441 4532 Email: <u>enquiry@kirloskar.ae</u> Website : <u>www.kirloskar.ae</u>

Kirloskar Oil Engines Limited reserved the right to change the design or specifications without notice. Contact your local distributor for more details.



Enriching Lives